

Chapter 4


Network Layer:

Data Plane

Yaxiong Xie

Department of Computer Science and Engineering
University at Buffalo, SUNY

Adapted from the slides of the book's authors

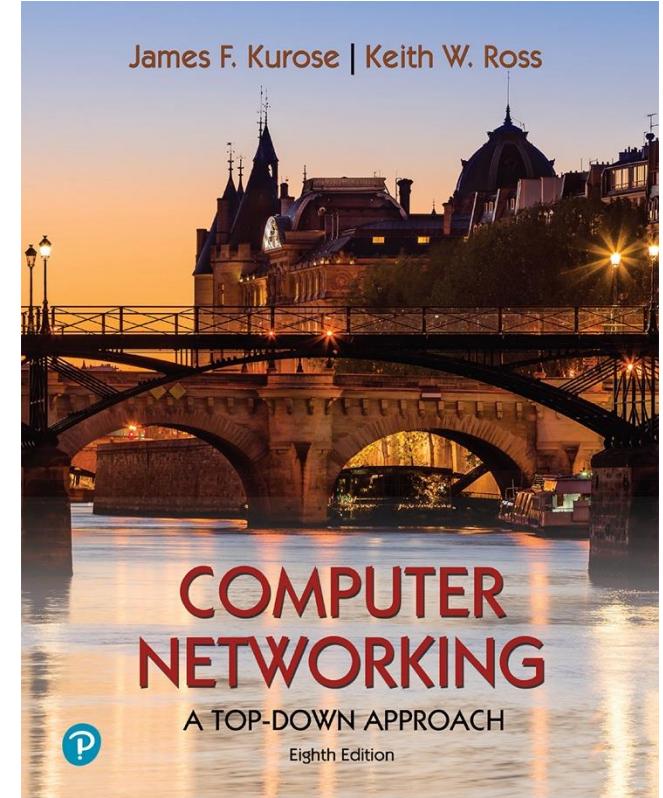

*Computer Networking: A
Top-Down Approach*
8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Subnet Mask

An IP address has two parts: **the network portion** and the **host portion**

- Network portion identifies the network
- Host portion identifies the specific device within that network.

Binary Notation of IP Address and Subnet

	Network Portion	Host Portion
IP Address	192.168.100.10	
	8 bits 11000000	8 bits 10101000

	Network Portion	Host Portion
Subnet Mask	255.255.255.0	
	8 bits 11111111	8 bits 11111111

- The **sequence of 1s** in the subnet mask indicates which bits of the IP address belong to the **network portion**
- The **sequence of 0s** indicates which bits belong to the **host portion**.


Subnet Mask

IP of a device inside
this network

Network Portion Host Portion
192.168.1.100


Q: How does *a host* get IP address
within its network (*host part* of
address)?

Q: How does *a network* get IP
address for itself (*network part*
of address)

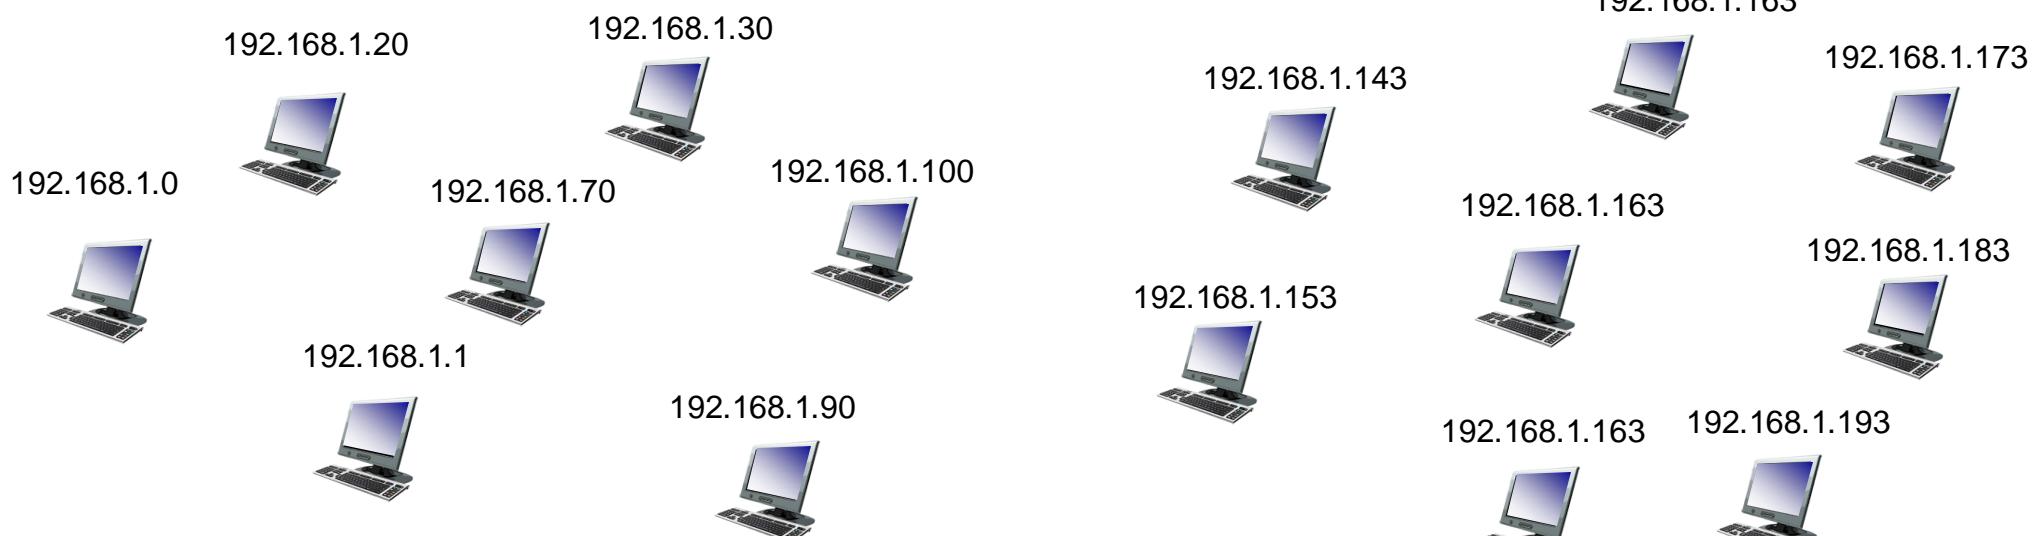

An IP network: **192.168.1.0 to 192.168.1.255**


IP address: How to obtain it?

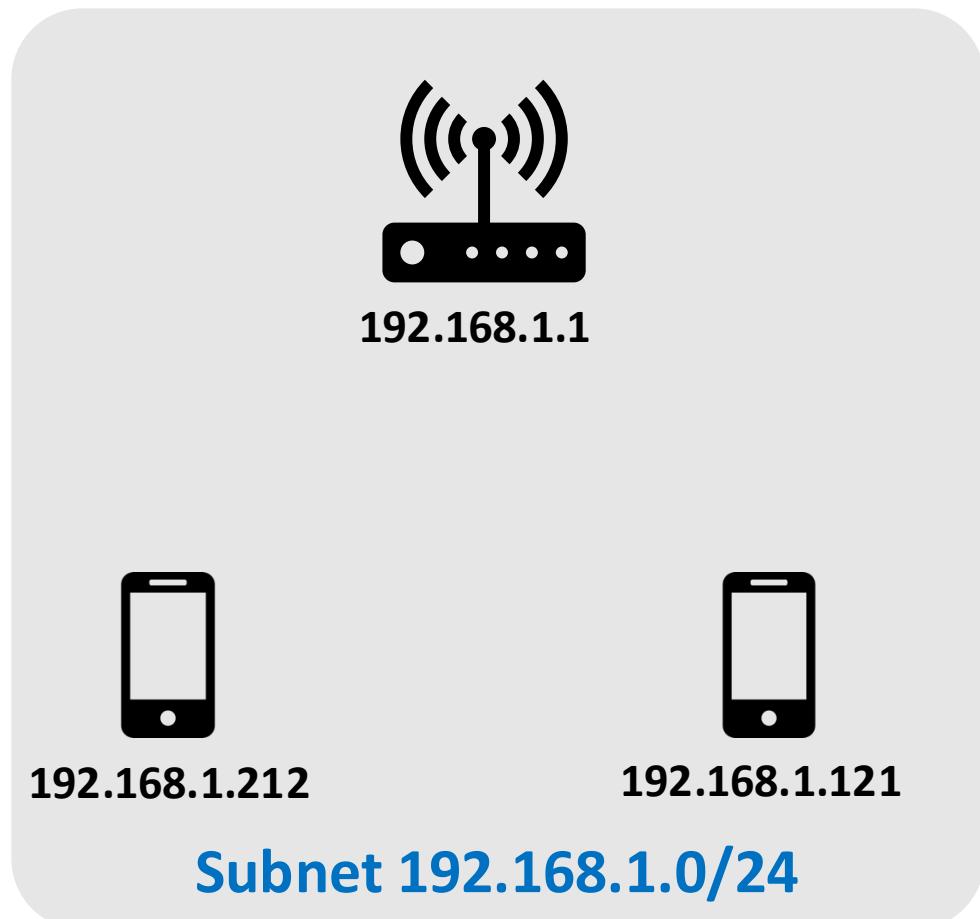

How does *host* get IP address?

- hard-coded by sysadmin in config file (e.g., `/etc/rc.config` in UNIX)
- **DHCP: Dynamic Host Configuration Protocol:** dynamically get address from as server
 - “plug-and-play”


DHCP: Dynamic Host Configuration Protocol

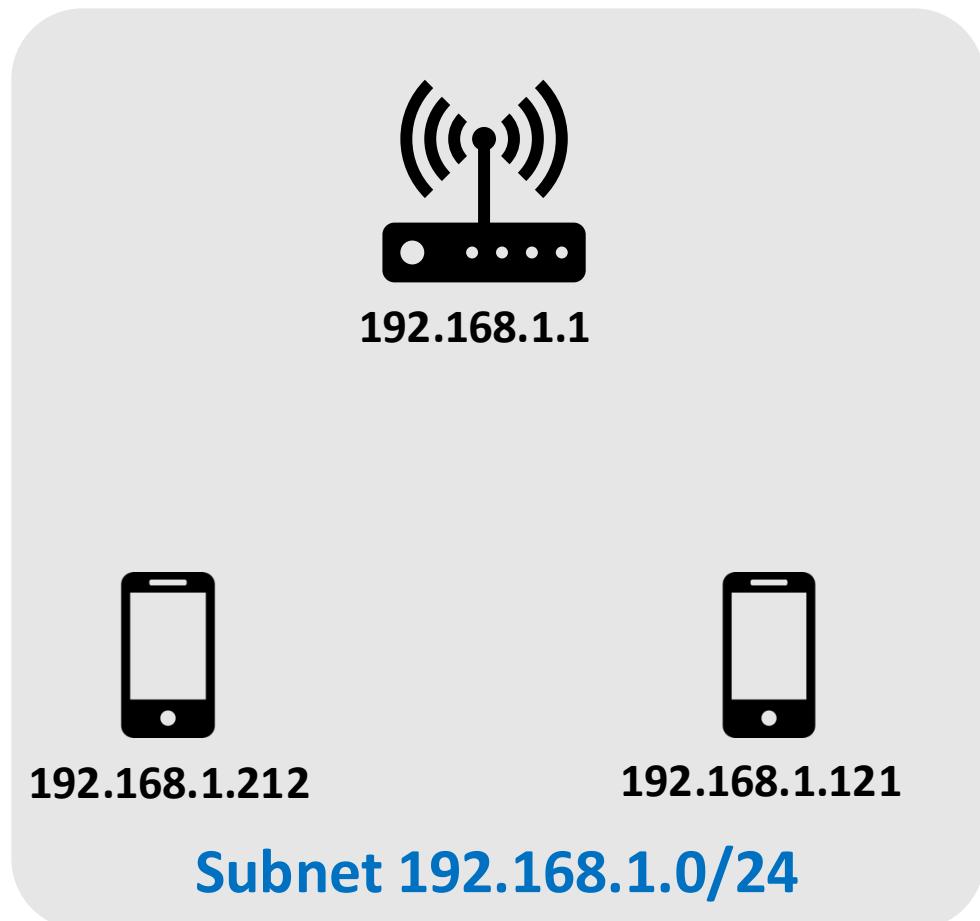

goal: host *dynamically* obtains IP address from network server when it “joins” network

- can renew its lease on address in use
- allows reuse of addresses (only hold address while connected/on)
- support for mobile users who join/leave network


DHCP: Dynamic Host Configuration Protocol

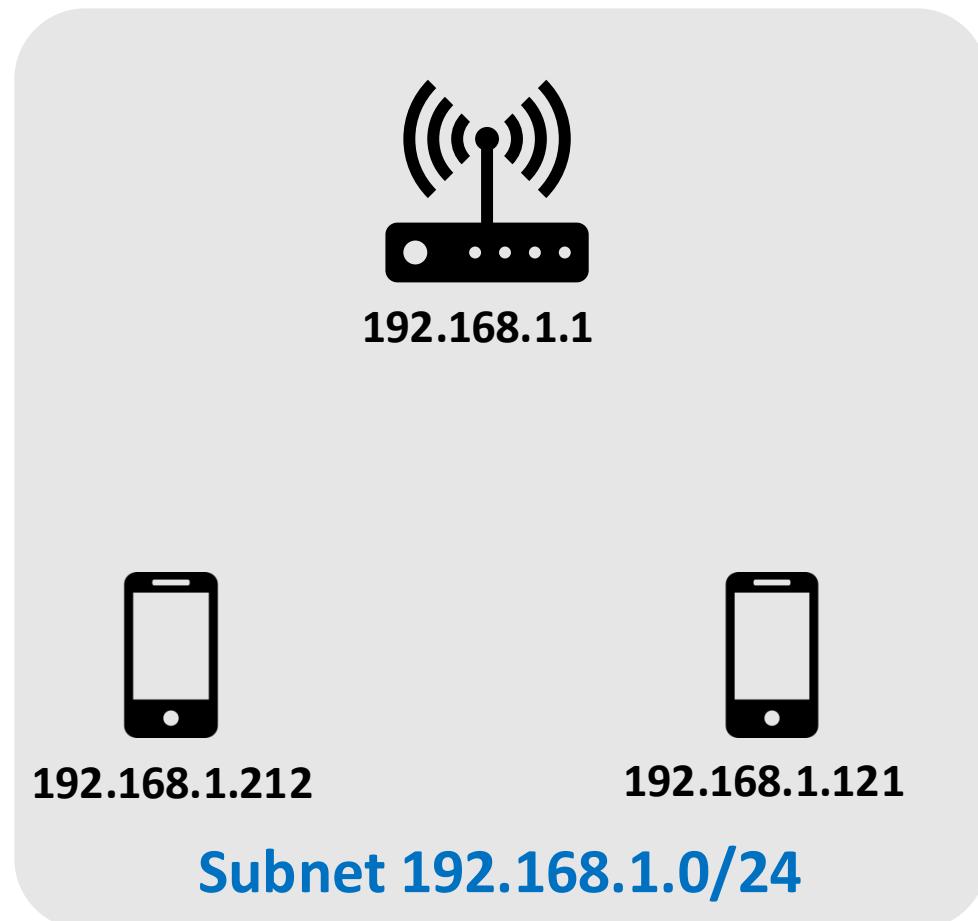

DHCP overview:

- host broadcasts **DHCP discover** msg [optional]
- DHCP server responds with **DHCP offer** msg [optional]
- host requests IP address: **DHCP request** msg
- DHCP server sends address: **DHCP ack** msg


DHCP: client-server

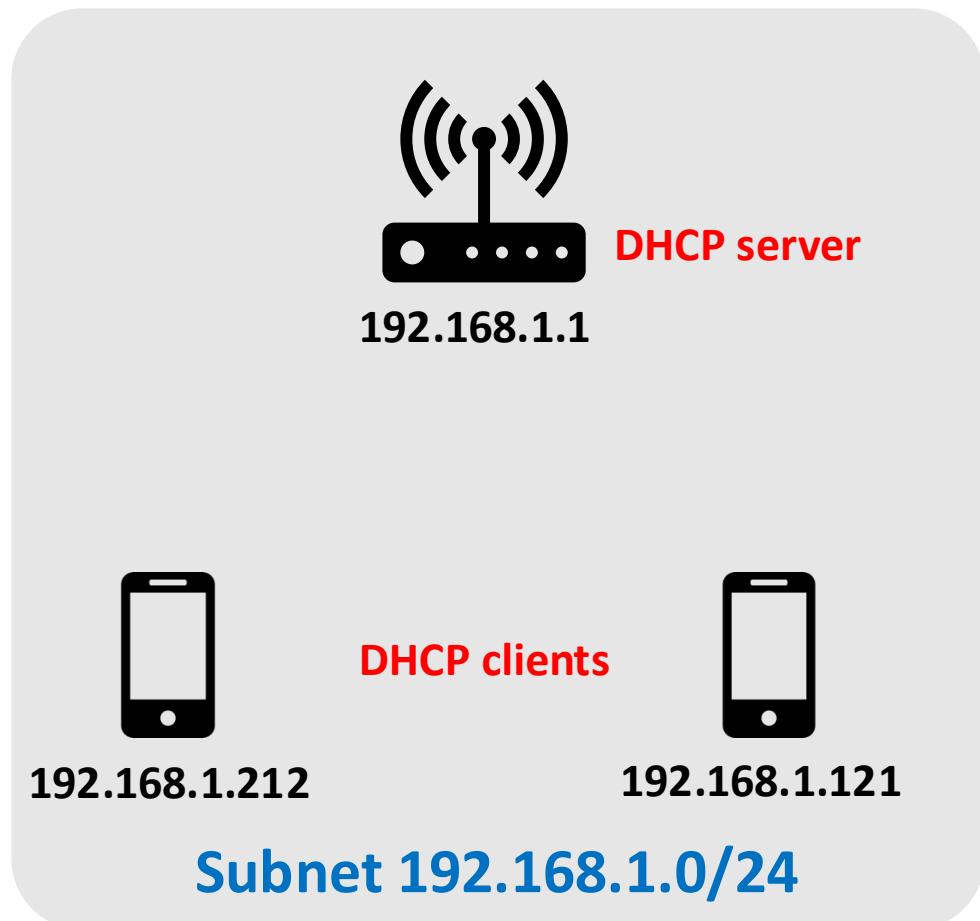

Typically, DHCP server will be co-located in router, serving all subnets to which router is attached

DHCP client-server scenario

DHCP server: 223.1.2.5

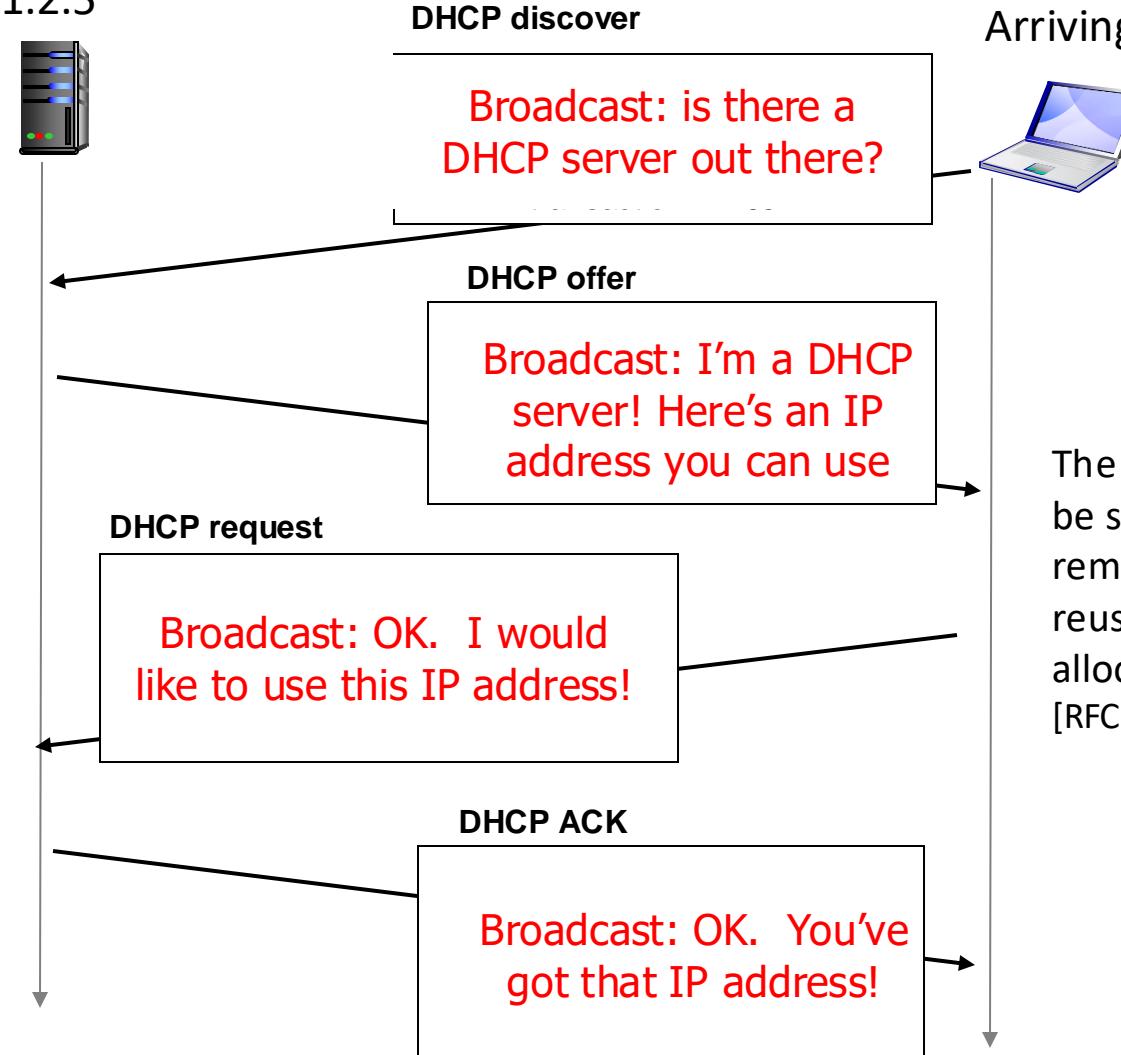

Arriving client


The two steps above can be skipped “if a client remembers and wishes to reuse a previously allocated network address” [RFC 2131]

DHCP: more than IP addresses

DHCP can return more than just allocated IP address on subnet:


- address of first-hop router for client
- name and IP address of DNS sever
- network mask (indicating network versus host portion of address)

DHCP: example

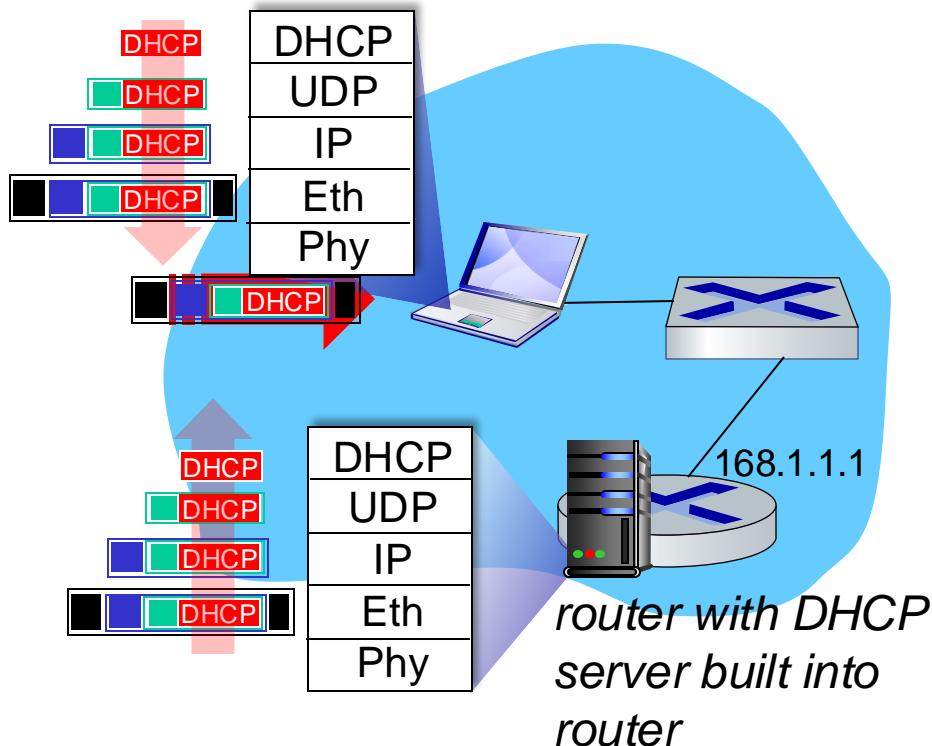

- Connecting laptop will use DHCP to get IP address, address of first-hop router, address of DNS server.
- DHCP REQUEST message encapsulated in UDP, encapsulated in IP, encapsulated in Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet de-mux'ed to IP de-mux'ed, UDP de-mux'ed to DHCP

DHCP: example

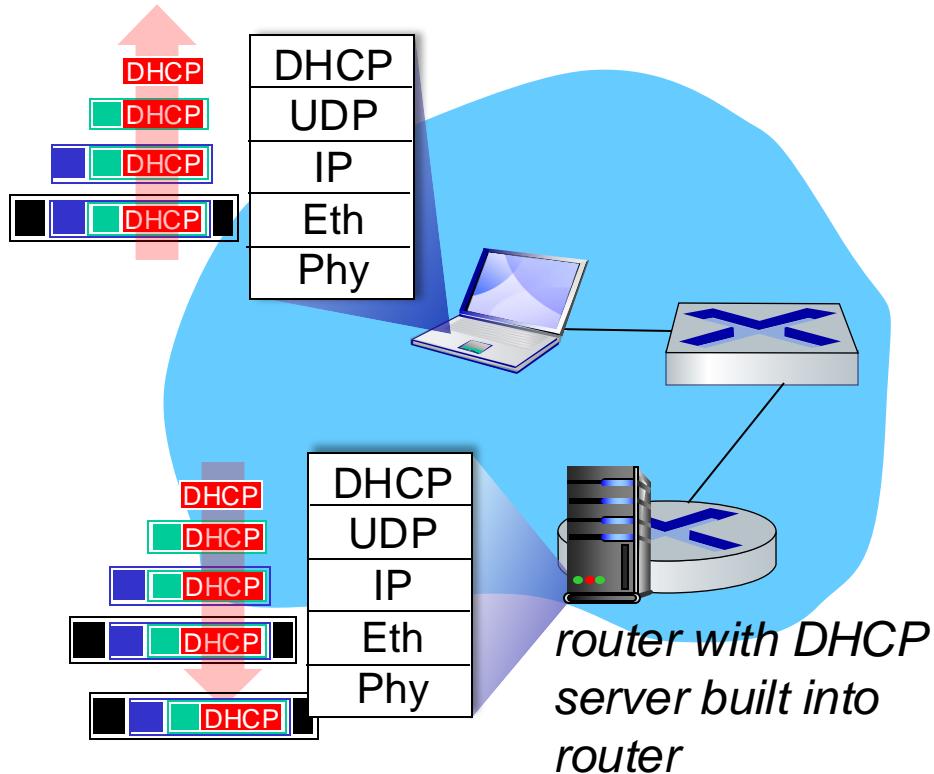

- DHCP server formulates DHCP ACK containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulated DHCP server reply forwarded to client, de-muxing up to DHCP at client
- client now knows its IP address, name and IP address of DNS server, IP address of its first-hop router

IP addresses: how to get one?


Network Portion Host Portion

192.168.1.100

Q: how does *network* get subnet part of IP address?

A: gets allocated portion of its provider ISP's address space

ISP's block 11001000 00010111 00010000 00000000 200.23.16.0/20

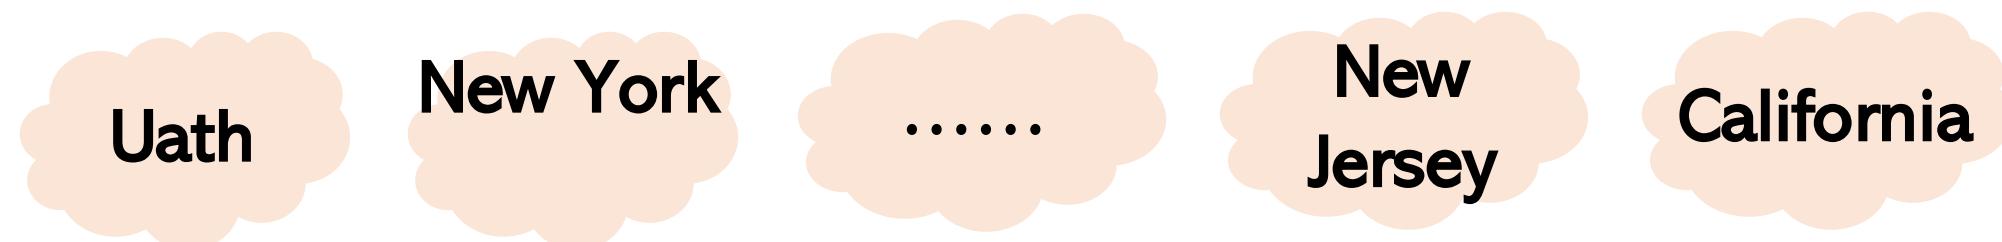

ISP can then allocate out its address space in 8 blocks:

Organization 0 11001000 00010111 00010000 00000000 200.23.16.0/23

Organization 1 11001000 00010111 00010010 00000000 200.23.18.0/23

Organization 2 11001000 00010111 00010100 00000000 200.23.20.0/23

...

.....


....

....

Organization 7 11001000 00010111 00011110 00000000 200.23.30.0/23


Hierarchical addressing: route aggregation

hierarchical addressing allows efficient advertisement of routing information:

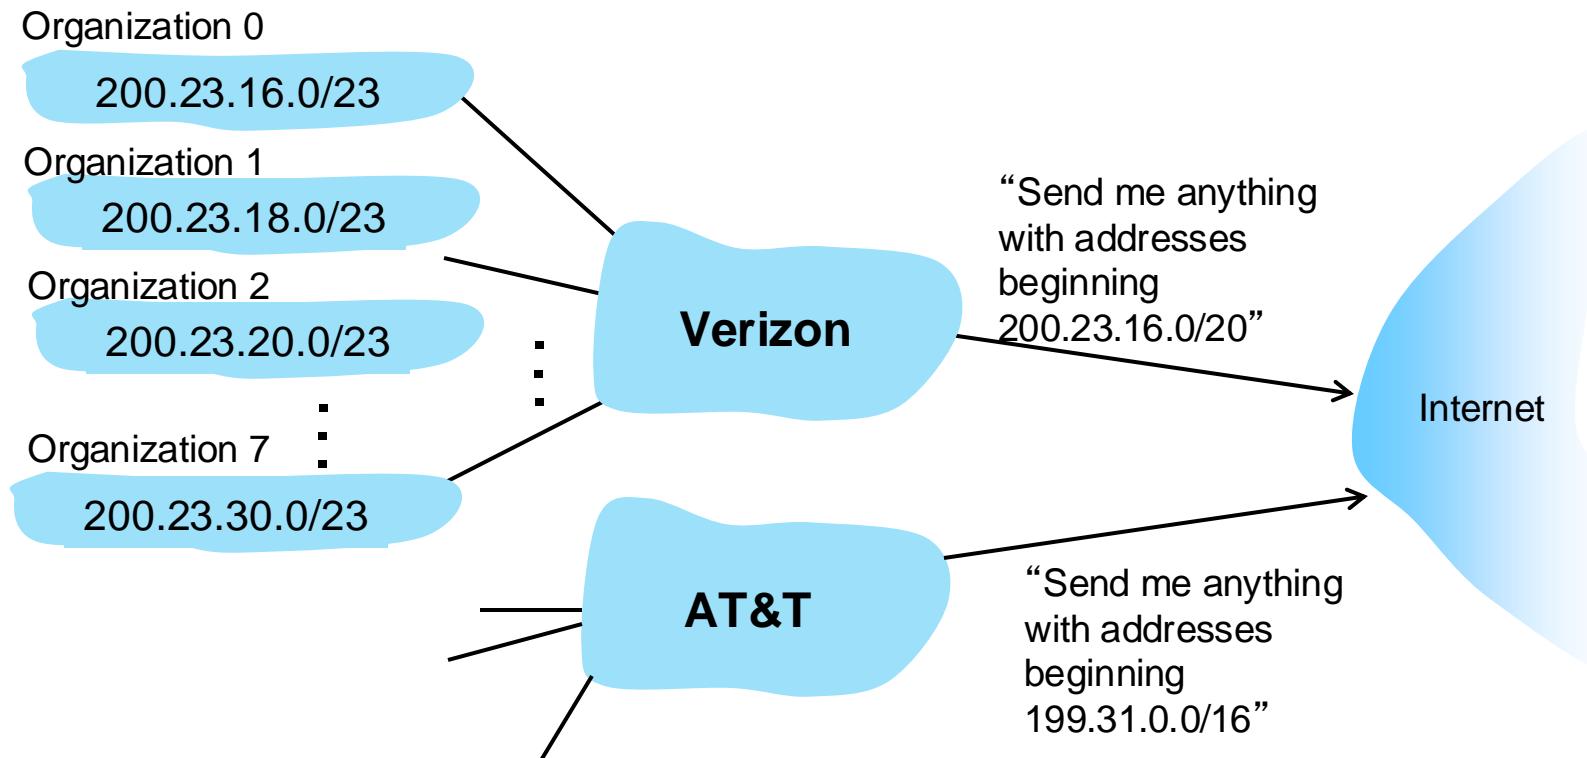


Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

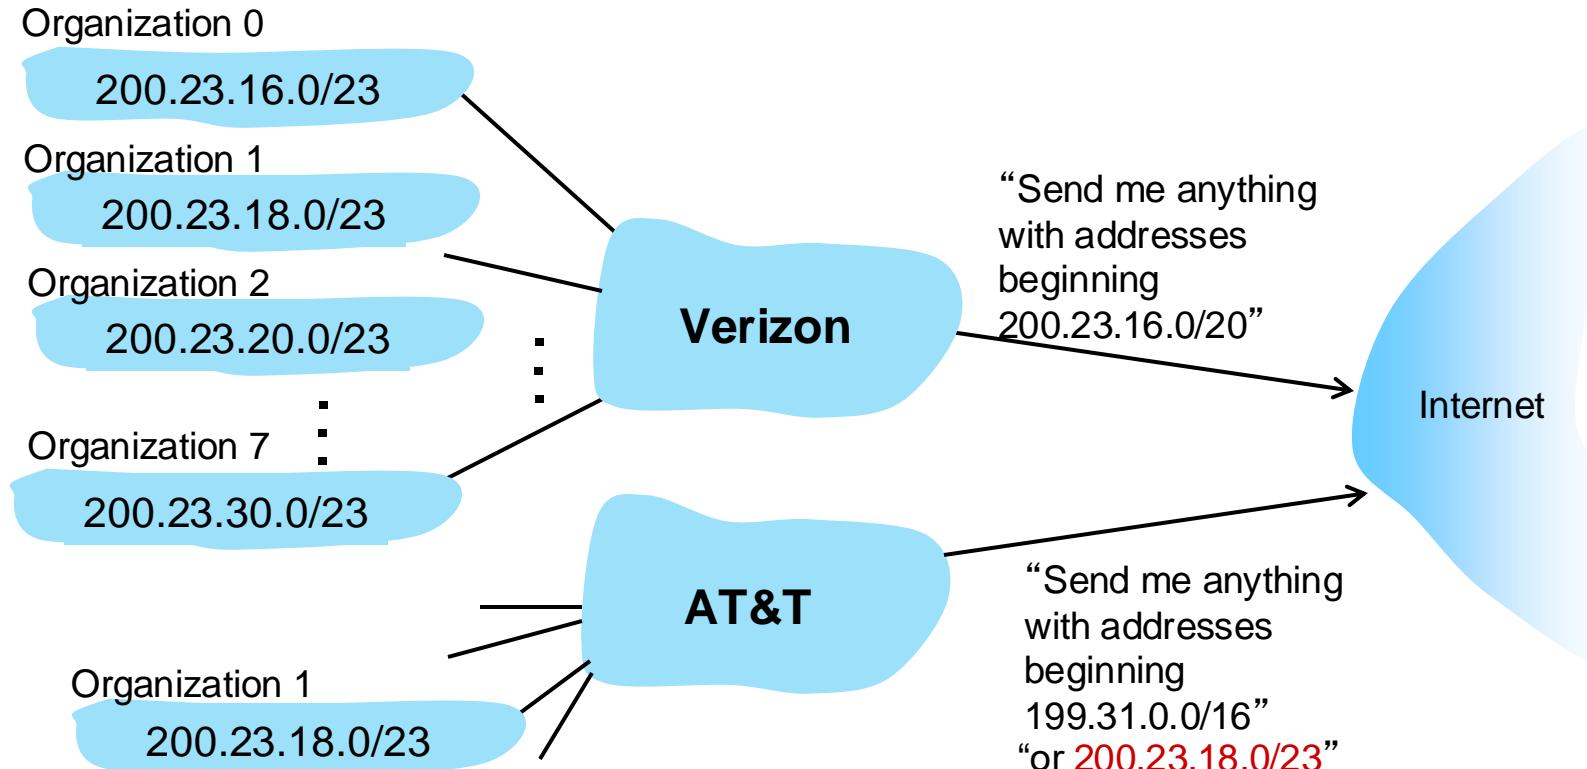

Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

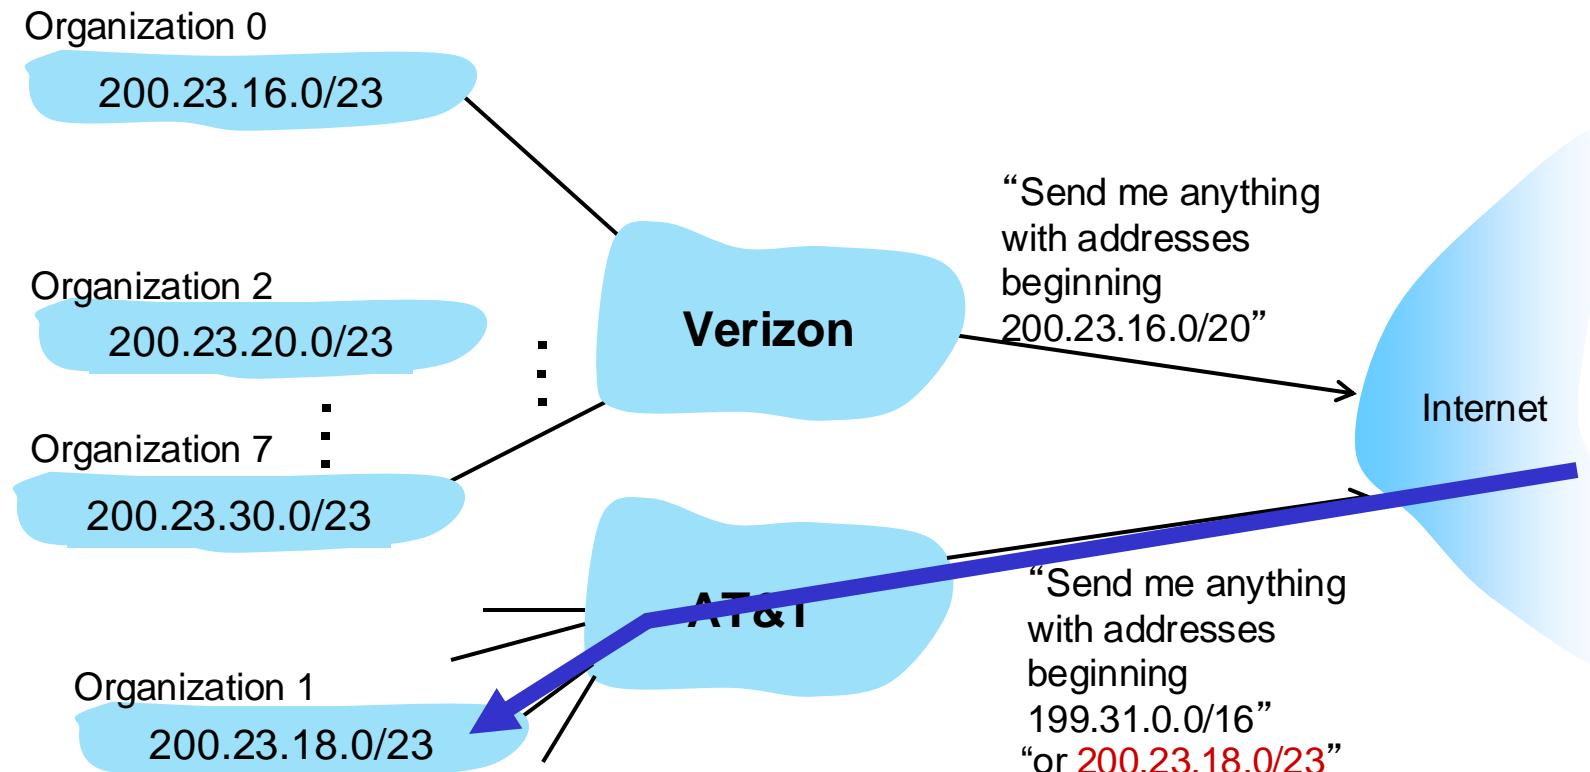

IP addressing: last words ...

Q: how does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers

<http://www.icann.org/>

- allocates IP addresses, through 5 regional registries (RRs) (who may then allocate to local registries)
- manages DNS root zone, including delegation of individual TLD (.com, .edu , ...) management

Q: are there enough 32-bit IP addresses?

- ICANN allocated last chunk of IPv4 addresses to RRs in 2011
- NAT (next) helps IPv4 address space exhaustion
- IPv6 has 128-bit address space

"Who the hell knew how much address space we needed?" Vint Cerf (reflecting on decision to make IPv4 address 32 bits long)

Network layer: “data plane” roadmap

- Network layer: overview
 - data plane
 - control plane
- What's inside a router
 - input ports, switching, output ports
 - buffer management, scheduling
- IP: the Internet Protocol
 - datagram format
 - addressing
 - network address translation
 - IPv6
- Generalized Forwarding, SDN
 - match+action
 - OpenFlow: match+action in action
- Middleboxes



Network layer: “data plane” roadmap


- Network layer: overview
 - data plane
 - control plane
- What's inside a router
 - input ports, switching, output ports
 - buffer management, scheduling
- IP: the Internet Protocol
 - datagram format
 - addressing
 - network address translation
 - IPv6



**Problem: Insufficient
IPv4 address**



NAT: network address translation

NAT: all devices in local network share just **one** IPv4 address as far as outside world is concerned

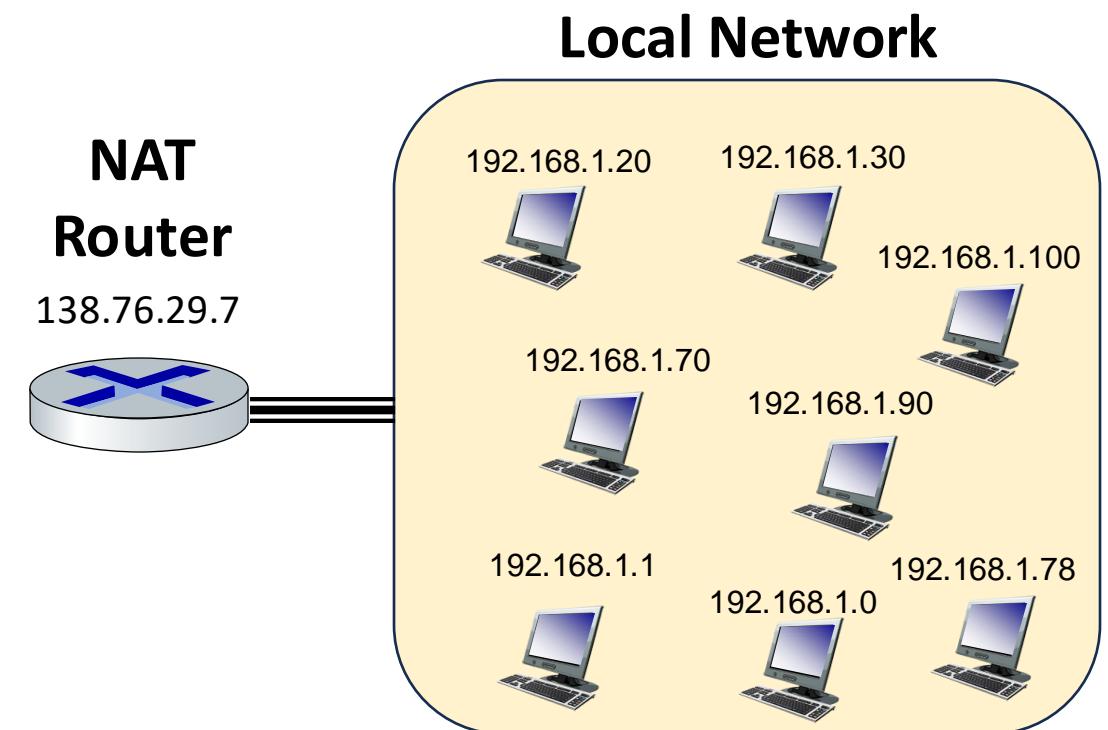


NAT: network address translation

NAT: all devices in local network share just **one** IPv4 address as far as outside world is concerned

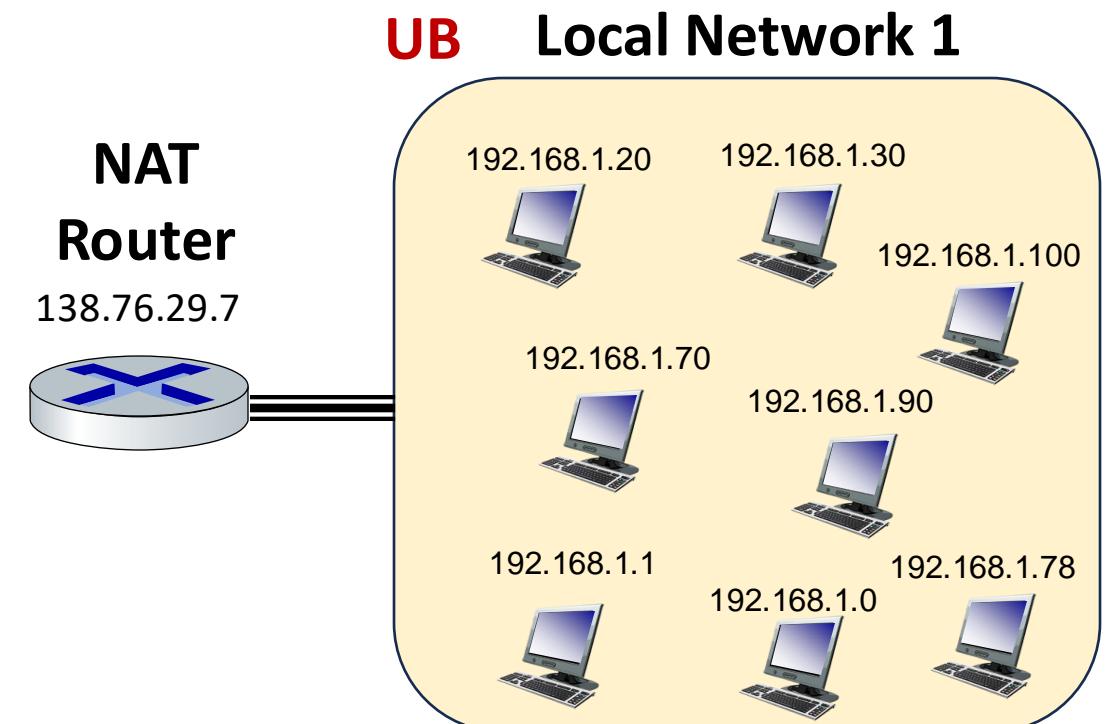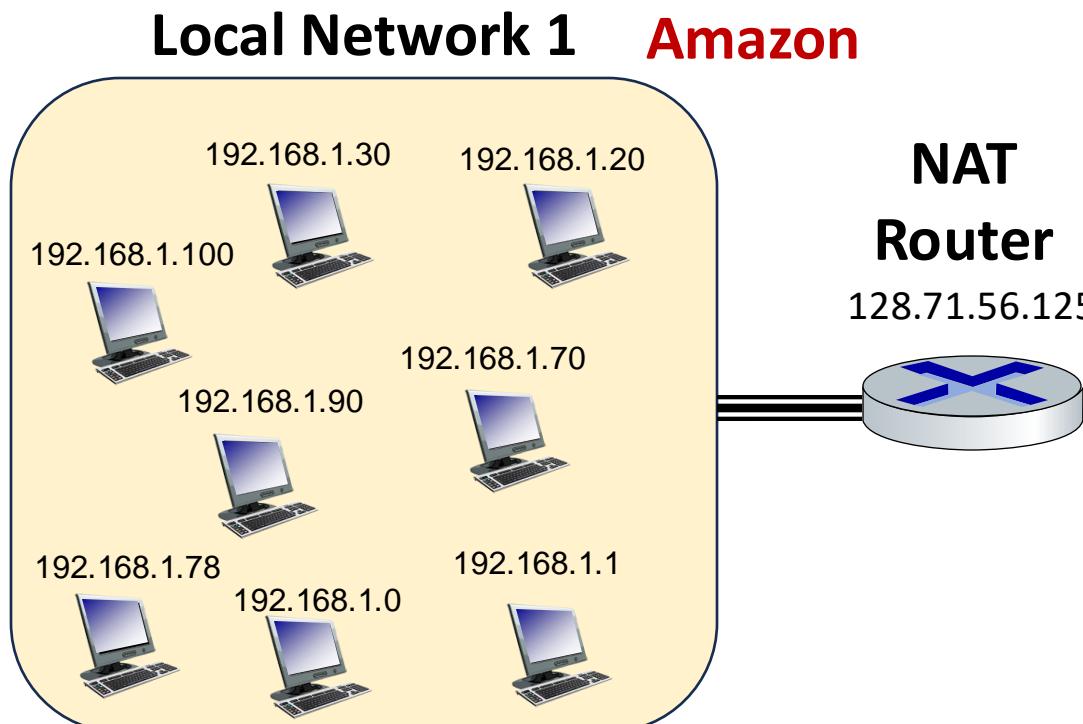

NAT: network address translation

NAT: all devices in local network share just **one** IPv4 address as far as outside world is concerned

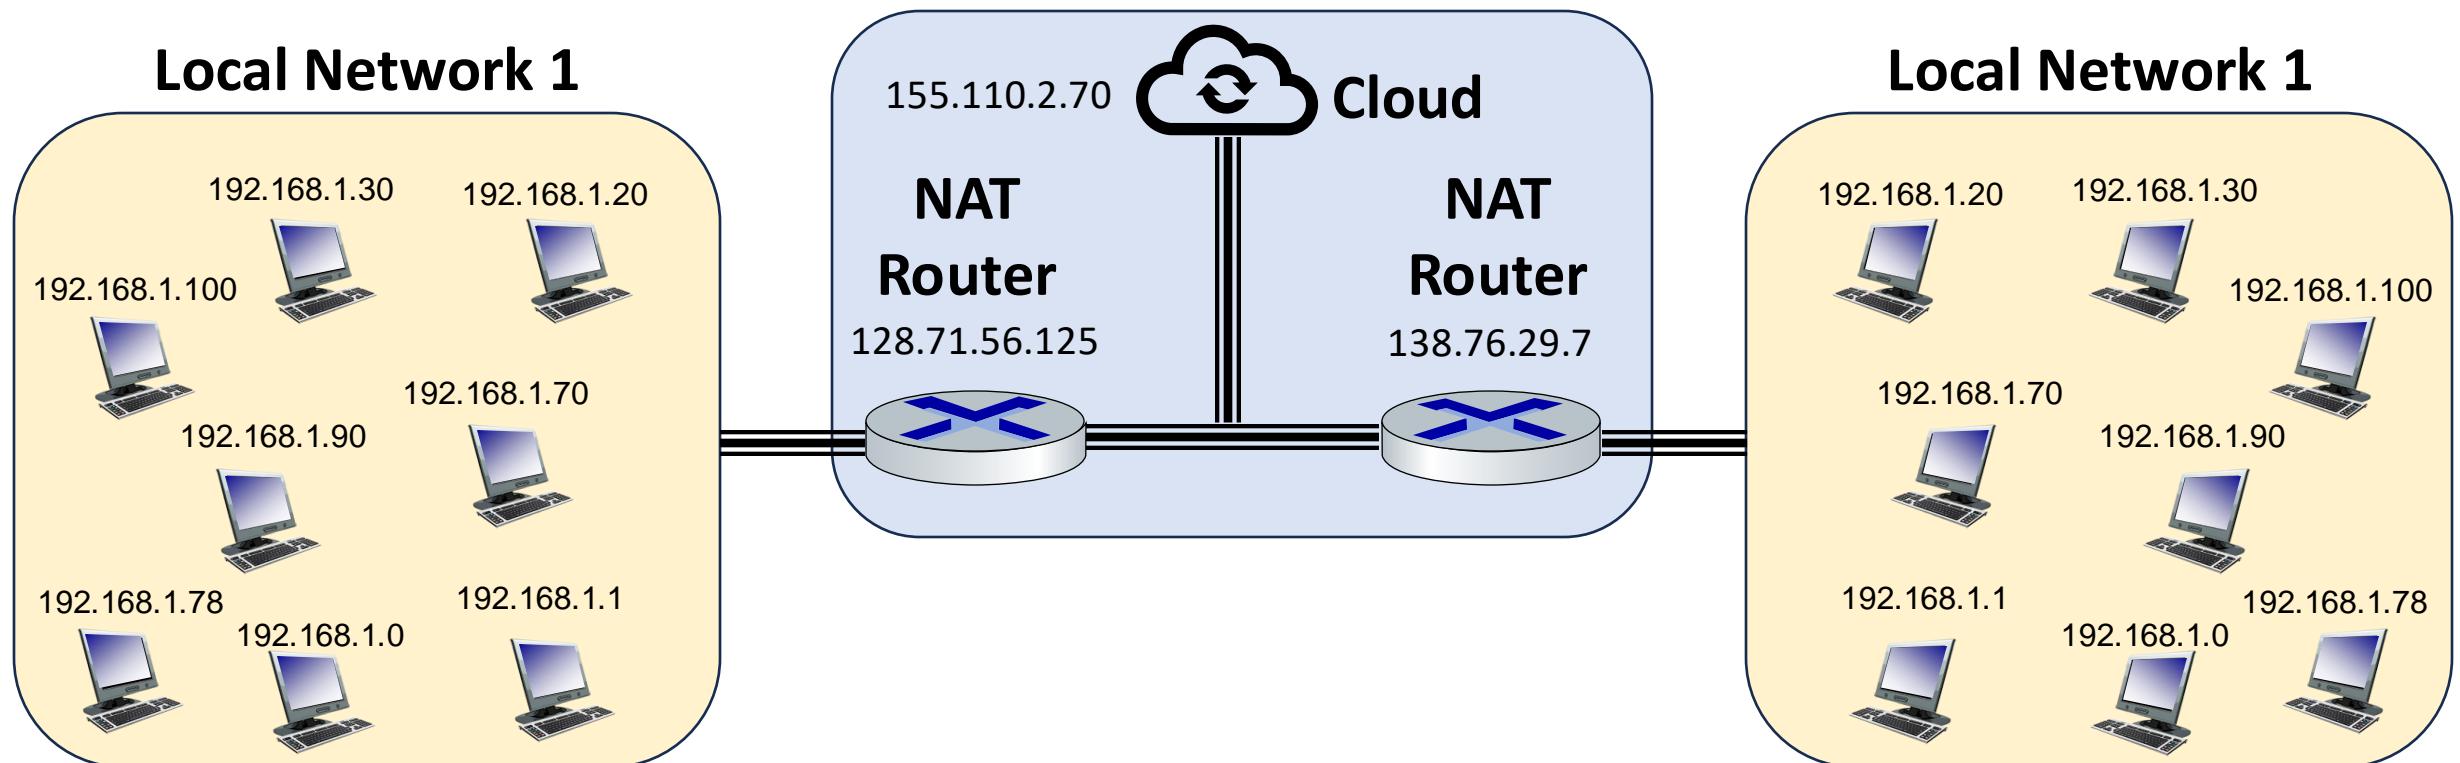


NAT: network address translation

- all devices in local network have 32-bit addresses in a “private” IP address space (10/8, 172.16/12, 192.168/16 prefixes) that can only be used in local network
- advantages:
 - just **one** IP address needed from provider ISP for ***all*** devices
 - can change addresses of host in local network without notifying outside world
 - can change ISP without changing addresses of devices in local network
 - security: devices inside local net not directly addressable, visible by outside world


NAT: network address translation

- outgoing datagrams: replace (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)
 - remote clients/servers will respond using (NAT IP address, new port #) as destination address
- remember (in NAT translation table) every (source IP address, port #) to (NAT IP address, new port #) translation pair

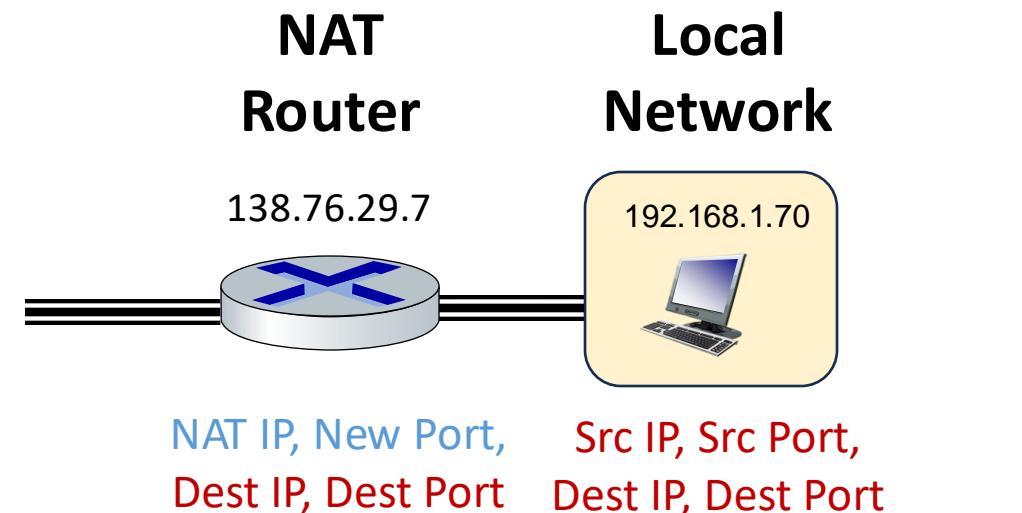

NAT: network address translation


- incoming datagrams: replace (NAT IP address, new port #) in destination fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

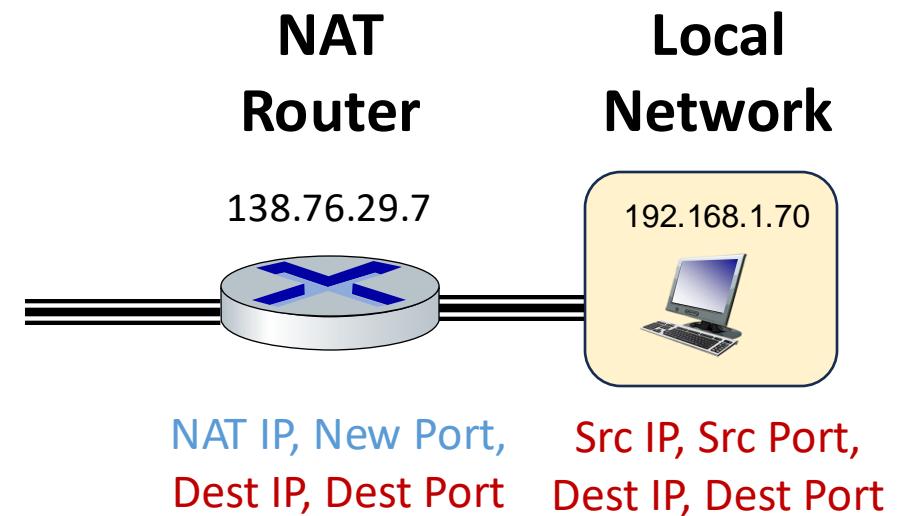

NAT Table: NAT IP, New Port, Src IP, Src Port

NAT: network address translation

2: NAT router changes datagram source address from 10.0.0.1, 3345 to 138.76.29.7, 5001, updates table

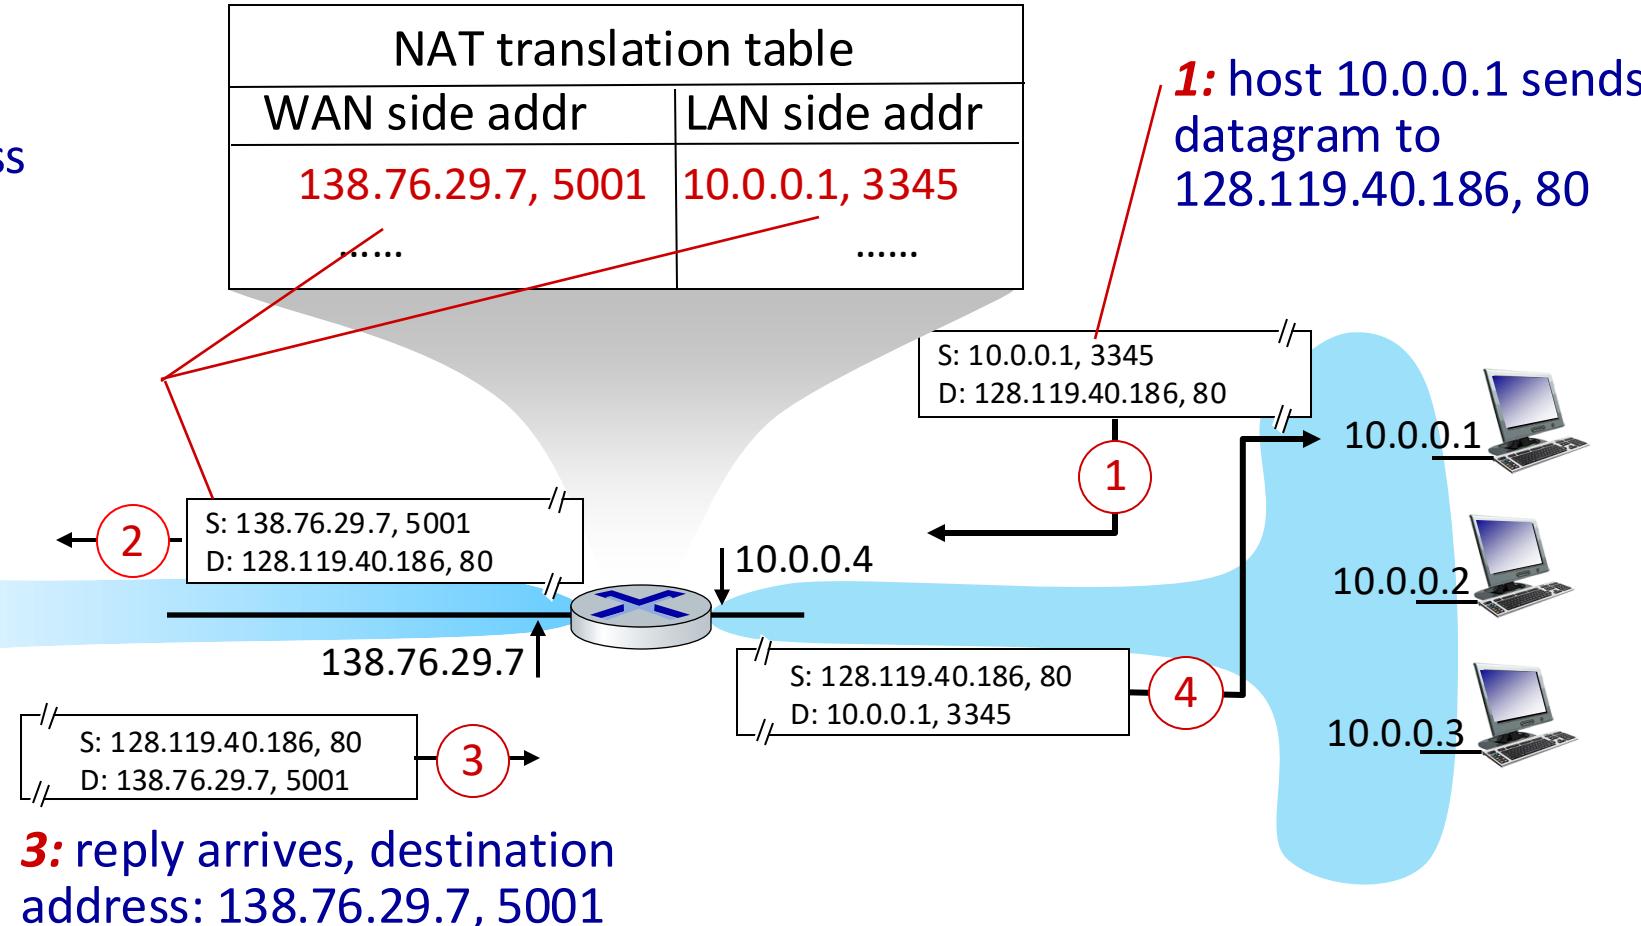

NAT: network address translation

- NAT has been controversial:
 - routers “should” only process up to layer 3 (**Port number is Transport**)
 - address “shortage” should be solved by IPv6
 - violates end-to-end argument (port # manipulation by network-layer device)
 - NAT traversal: what if client wants to connect to server behind NAT?
- but NAT is here to stay:
 - extensively used in home and institutional nets, 4G/5G cellular nets


IPv6: motivation

- **initial motivation:** 32-bit IPv4 address space would be completely allocated
- additional motivation:
 - speed processing/forwarding: 40-byte fixed length header
 - enable different network-layer treatment of “flows”

IPv6 datagram format

priority: identify priority among datagrams in flow

128-bit
IPv6 addresses

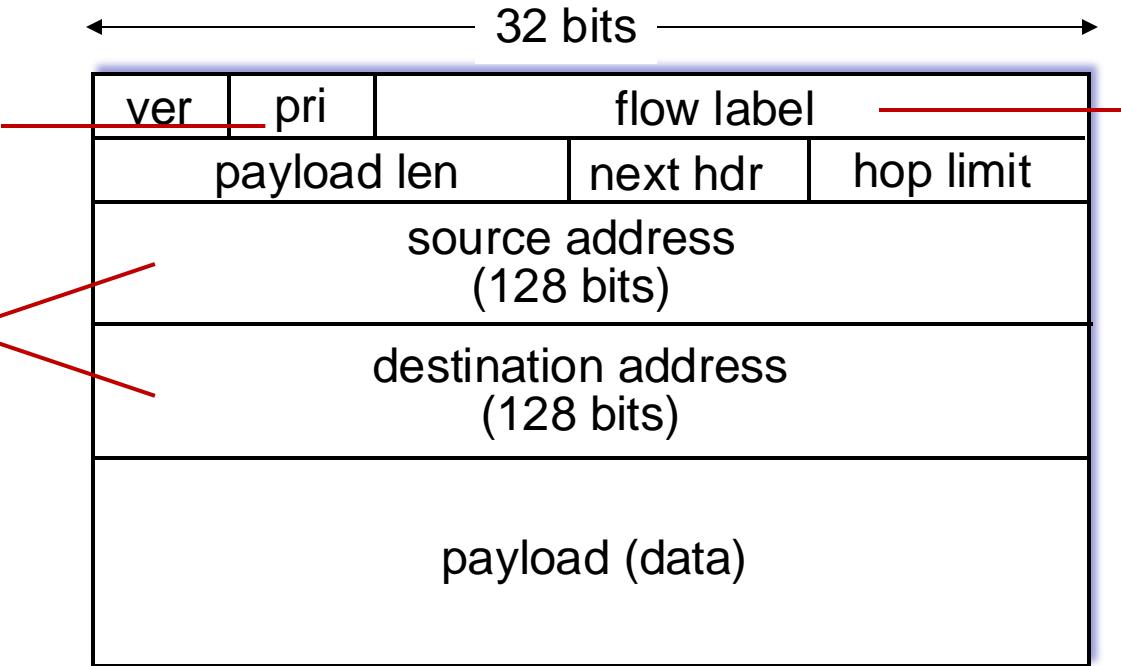


flow label: identify datagrams in same "flow." (concept of "flow" not well defined).

What's missing (compared with IPv4):

- no checksum (to speed processing at routers)
- no fragmentation/reassembly
- no options (available as upper-layer, next-header protocol at router)


Transition from IPv4 to IPv6

- not all routers can be upgraded simultaneously
 - no “flag days”
 - how will network operate with mixed IPv4 and IPv6 routers?
- **tunneling:** IPv6 datagram carried as *payload* in IPv4 datagram among IPv4 routers (“packet within a packet”)
 - tunneling used extensively in other contexts (4G/5G)

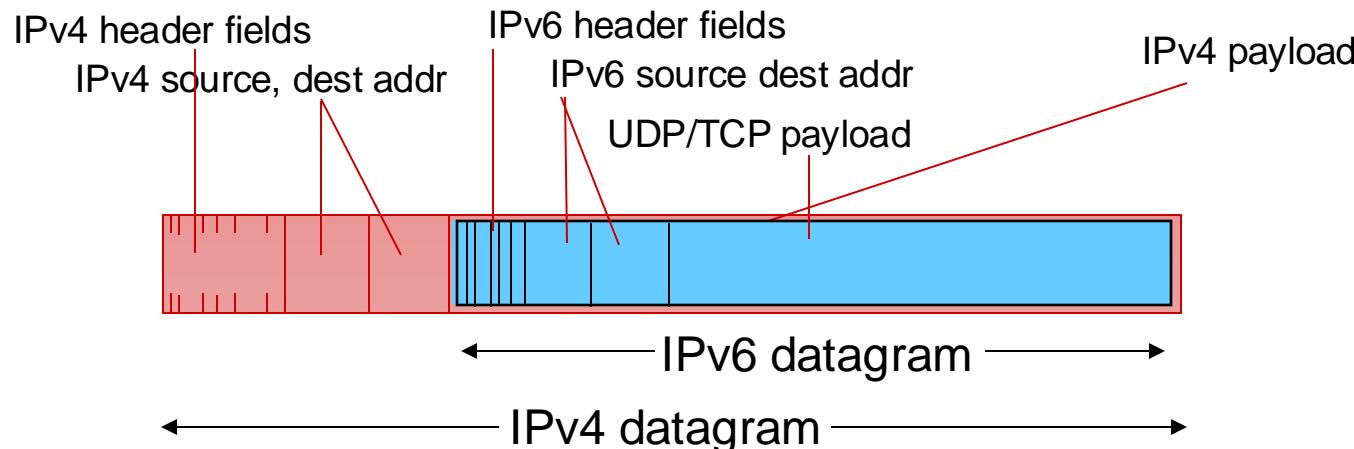


Tunneling and encapsulation

Ethernet connecting
two IPv6 routers:

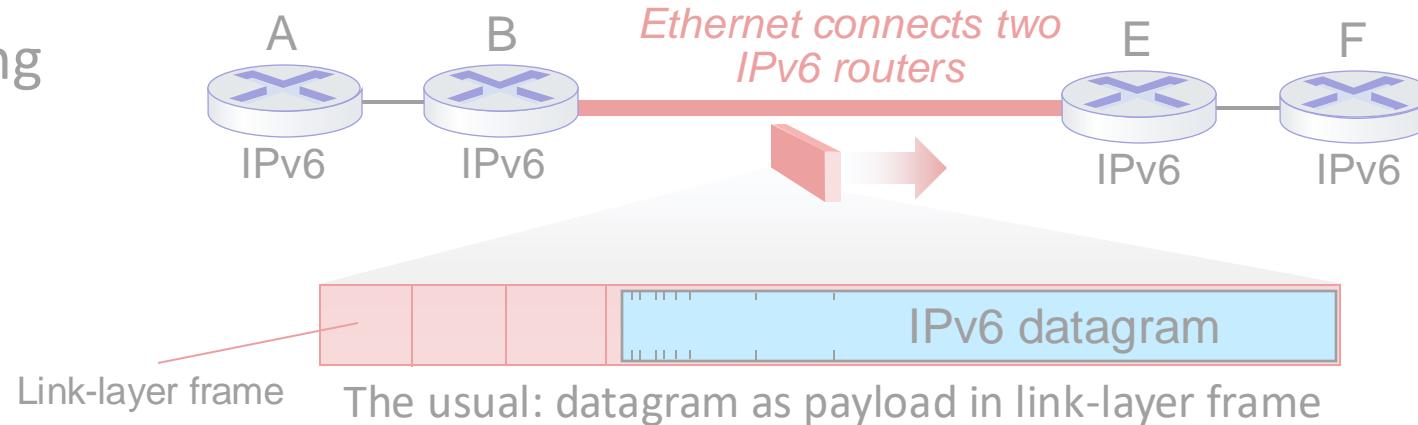


IPv4 network
connecting two
IPv6 routers

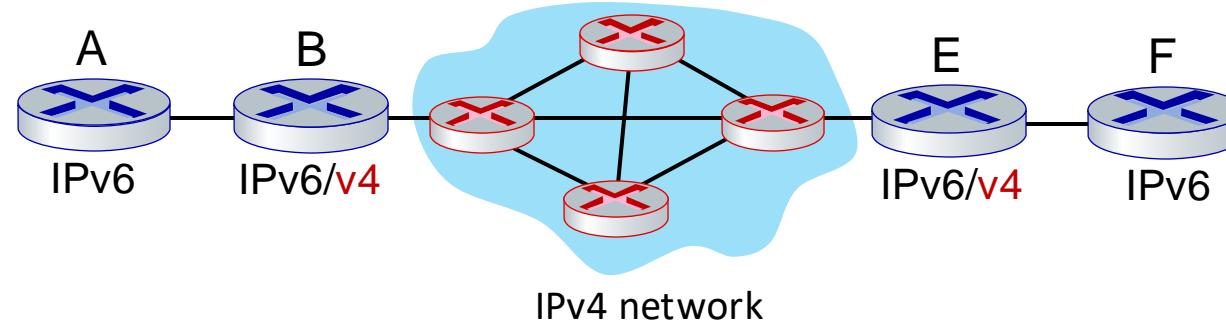


Tunneling and encapsulation

Ethernet connecting
two IPv6 routers:

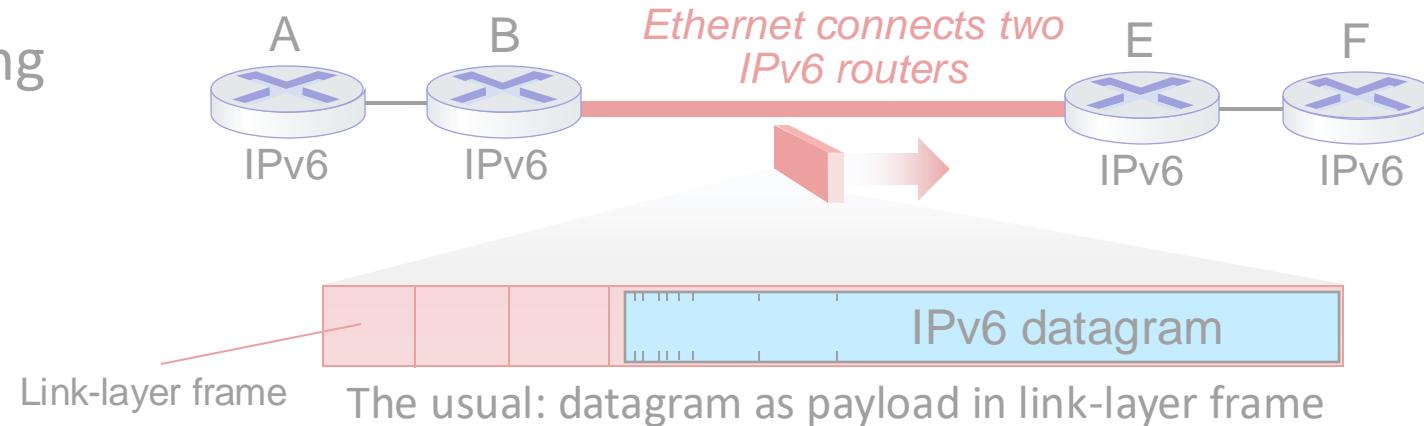


IPv4 tunnel
connecting two
IPv6 routers

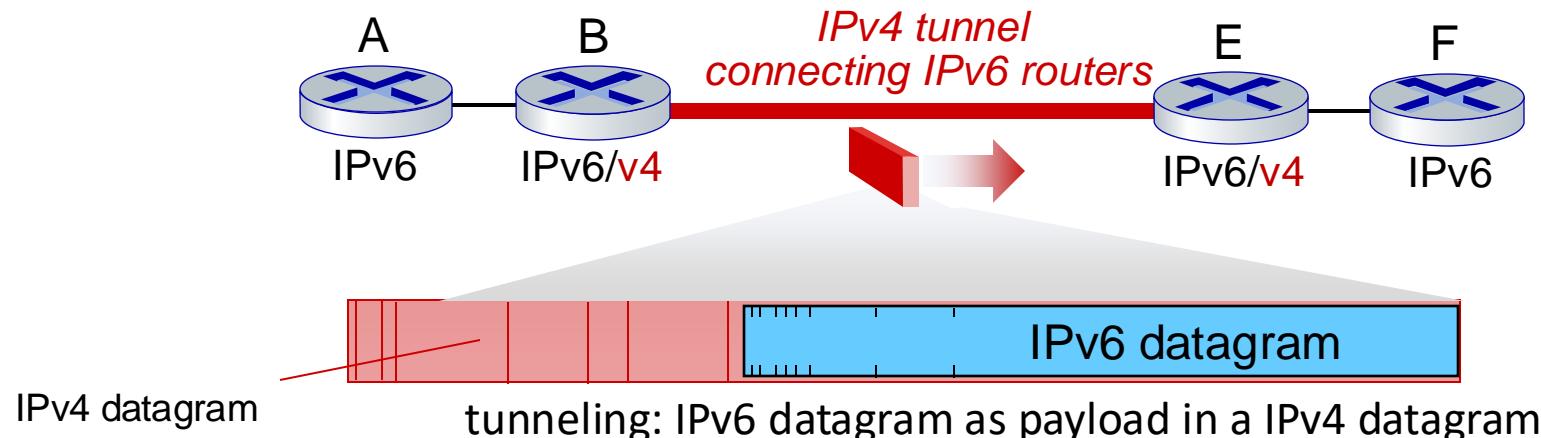


Tunneling

logical view:

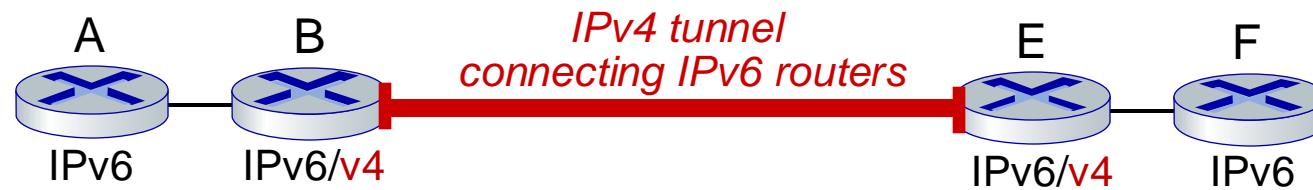

physical view:

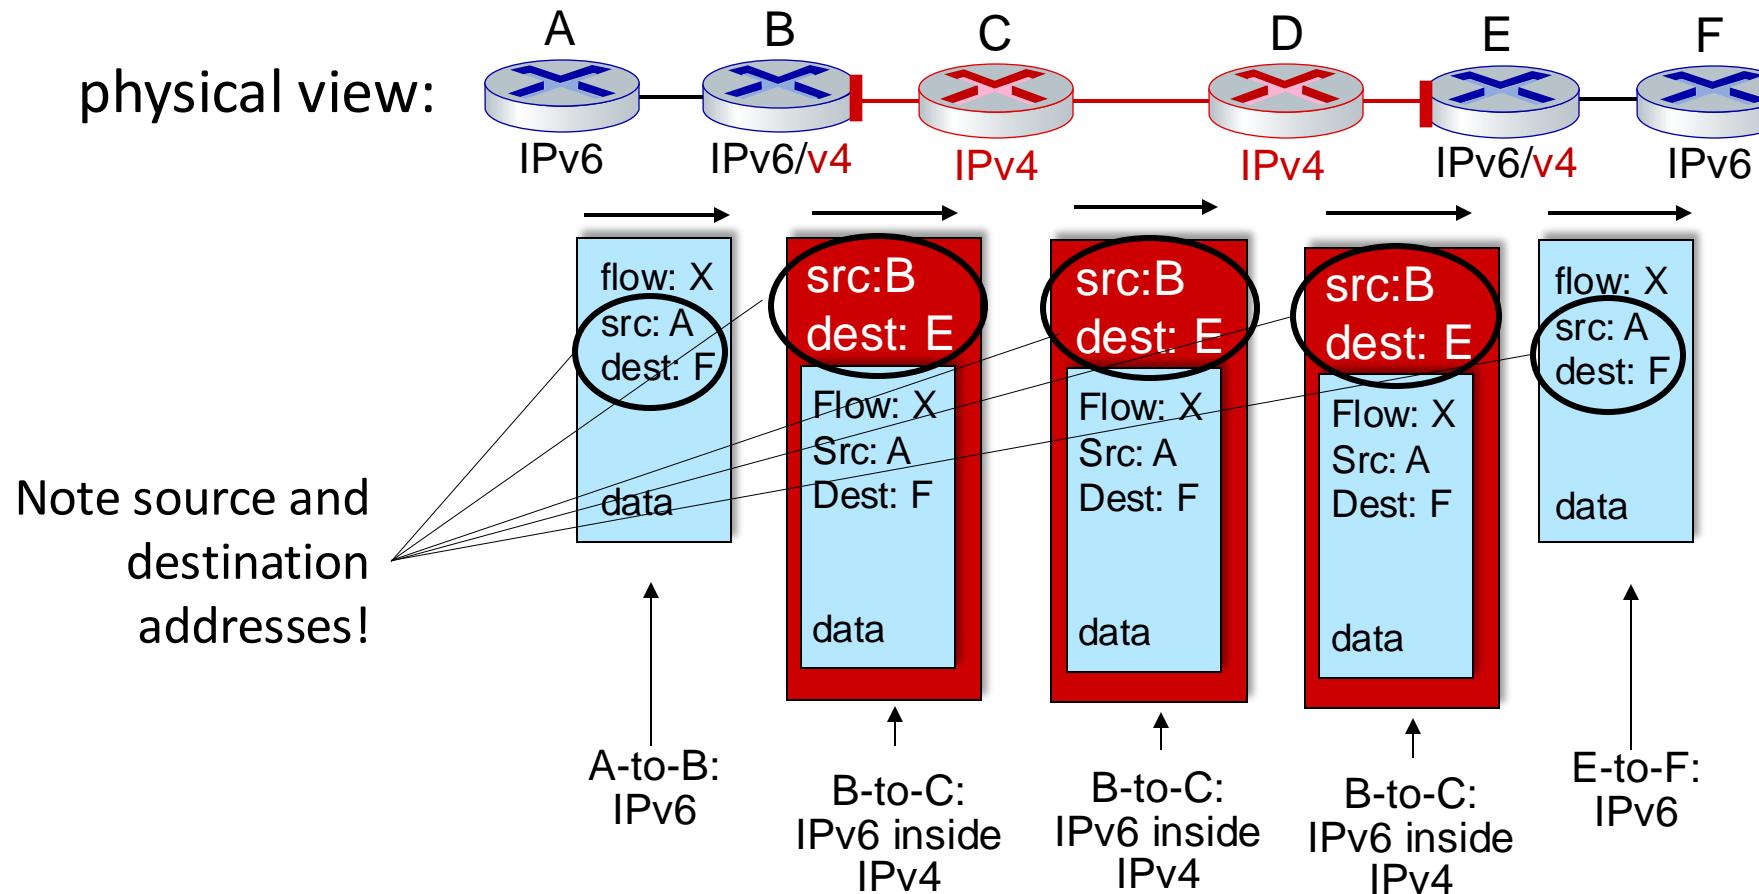


IPv6: adoption

- Google¹: ~ 40% of clients access services via IPv6 (2023)
- NIST: 1/3 of all US government domains are IPv6 capable

IPv6 Adoption

We are continuously measuring the availability of IPv6 connectivity among Google users. The graph shows the percentage of users that access Google over IPv6.

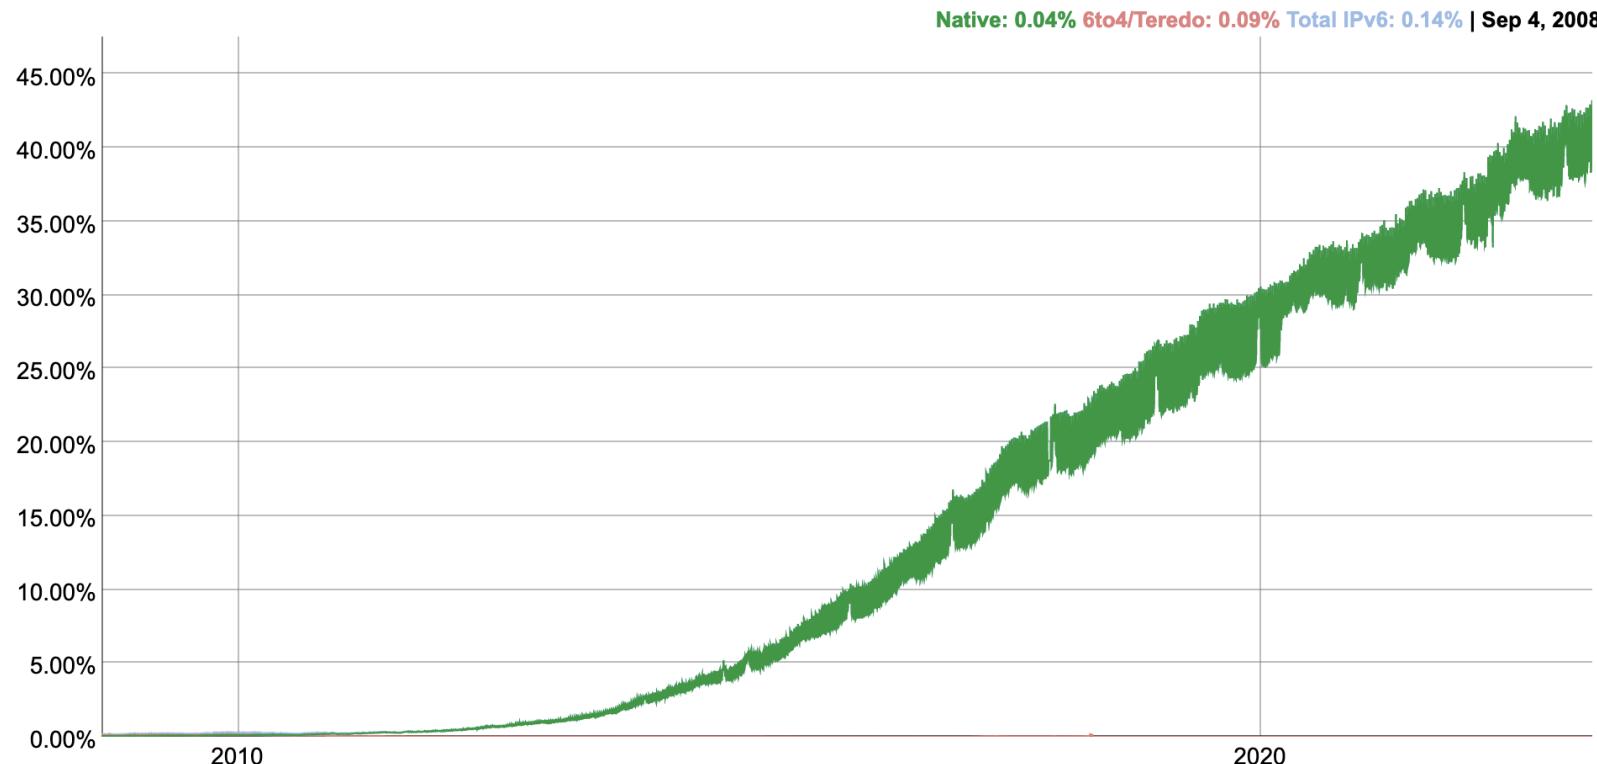

IPv6: adoption

- Google¹: ~ 40% of clients access services via IPv6 (2023)
- NIST: 1/3 of all US government domains are IPv6 capable
- Long (long!) time for deployment, use
 - 25 years and counting!
 - think of application-level changes in last 25 years: WWW, social media, streaming media, gaming, telepresence, ...

¹ <https://www.google.com/intl/en/ipv6/statistics.html>